



# Line 3000




Kelvin	Leistung	CRI	Lumen	Lm/W	Länge/mm	IP	Abdeckung/Standard
3000	29.7W	>85	4257	144	1150	40	Opal Flach, PMMA
4000	29.7W	>85	4485	151	1150	40	Opal Flach, PMMA
3000	43.2W	>85	5510	128	1150	40	Opal Flach, PMMA
4000	43.2W	>85	5860	136	1150	40	Opal Flach, PMMA
3000	37.1W	>85	5321	144	1435	40	Opal Flach, PMMA
4000	37.1W	>85	5604	151	1435	40	Opal Flach, PMMA
3000	54W	>85	6895	128	1435	40	Opal Flach, PMMA
4000	54W	>85	7325	136	1435	40	Opal Flach, PMMA



Opal Flach  
(Standard)



Prisma Diffusor

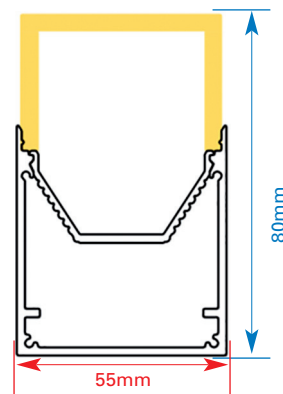

U-Diffusor

Weitere Optionen auf Anfrage.